MINEBEA
HAMAMATSU

PM Series Stepping Motors

PM42S-096

APPLICATIONS

Printers / Fax machines / Photocopiers

SPECIFICATIONS

Reference characteristics

Motor Size	PM42S-096	
Number of Steps per Rotation	96(3.75° / Step)	
Drive Method	2-2 PHASE	
Drive Circuit	UNIPOLAR CONST. VOLT.	BIPOLAR CHOPPER
Drive Voltage	24[V]	24[V]
Current / PHASE		500[mA]
Coil Resistance / PHASE	90[Ω]	10[Ω]
Drive I C	SMDT-002	UDN2916B-V
Magnet Material	Nd-Fe-B bonded magnet	
Insulation Resistance	100M[Ω] MIN	
Dielectric Strength	AC 500[V] 1[min]	
Class of Insulation	CLASS E	
Operating Temp.	-10[°C] ~ 50[°C]	
Storage Temp.	-30[°C] ~ 80[°C]	
Operating Hum.	20[%] RH ~ 90[%] RH	

Torque characteristics

PM42S-096 UNI-CONST. V(at 24[V],90[Ω])

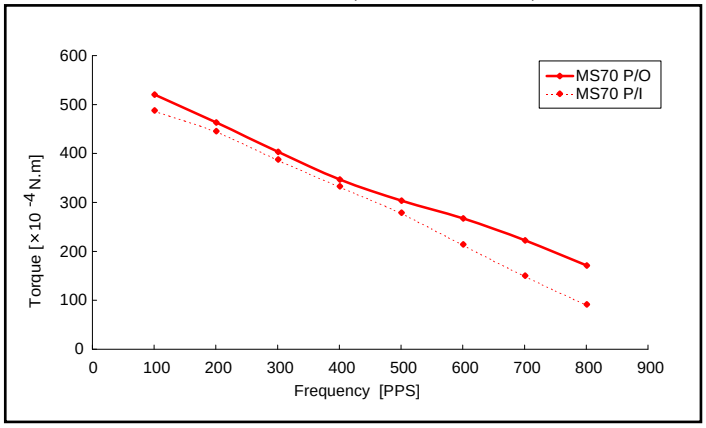

PM42S-096 BI-CHOPPER(at 24[V],10[Ω],500[mA])

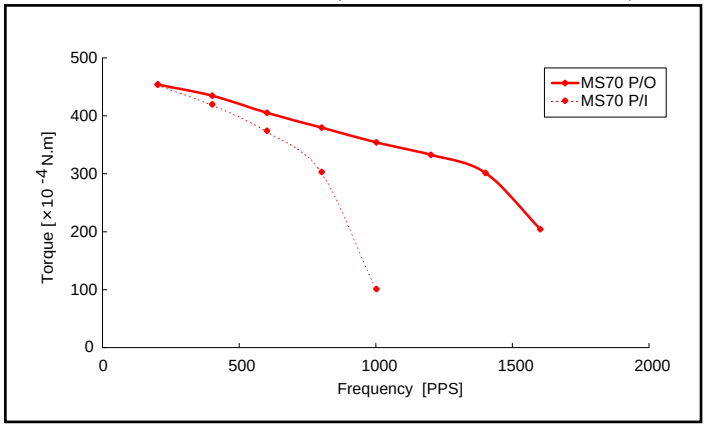

These torque values are general reference values. When using motors, factors such as heat radiation conditions and duty effect heat rise, therefore please select motors after considering the heat conditions in the actual equipment.

Dimensions

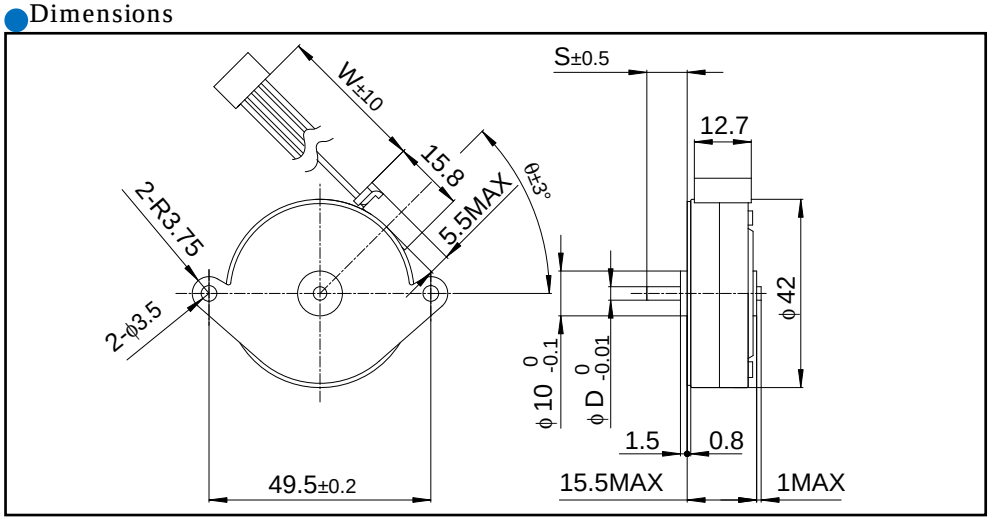

If you would like to know this Dimensions(D,S,W,θ),Please see Standerd Dimensions in our Home Page.

© Minebea Electronics Co., Ltd. 2000